



ITCS214

Lesson (1)

Array List

ArrayList :

- In java there is a built-in class called **ArrayList**.

- To import this class: *import java.util.*;*
import java.util.ArrayList;

- To create an ArrayList object called **list** that will store **Integer**:

ArrayList<Integer> list = new ArrayList <Integer> ();

or


ArrayList<Integer> list = new ArrayList <> ();

or simply


ArrayList<Integer> list = new ArrayList();

1. int size ()

This method return the actual number of elements in the list.

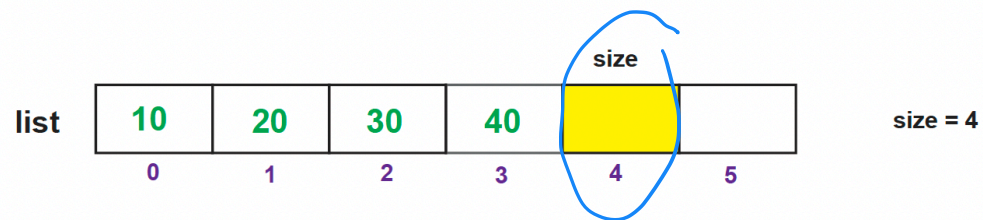


```
int s = list.size();
```

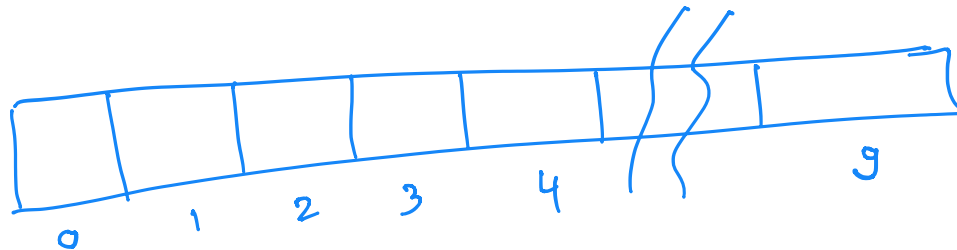

Capacity = 10
Size = 0


2. boolean isEmpty ()

This method to check whether the list is empty or not.



```
boolean l1= list.isEmpty();
```

true





```
boolean l2= list.isEmpty();
```

false


3. boolean add (E item)

E means generic data type like (int, double,...)

It add item at the end of the list, and always returns true.

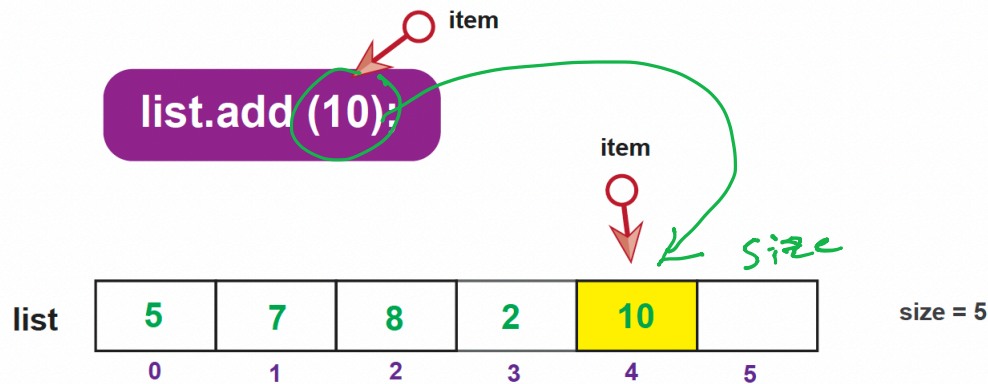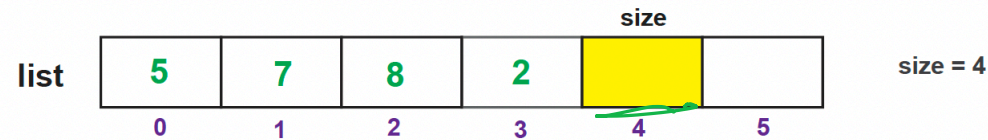


add(10)

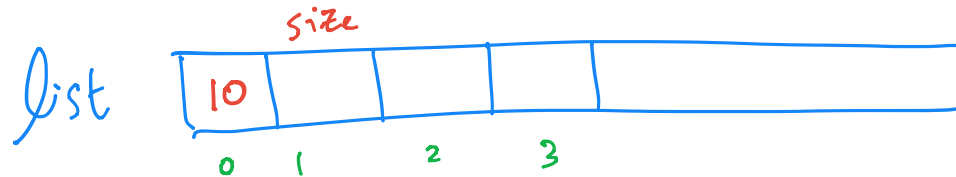


4. void add (int index, E item)

This method adds item at the location index.

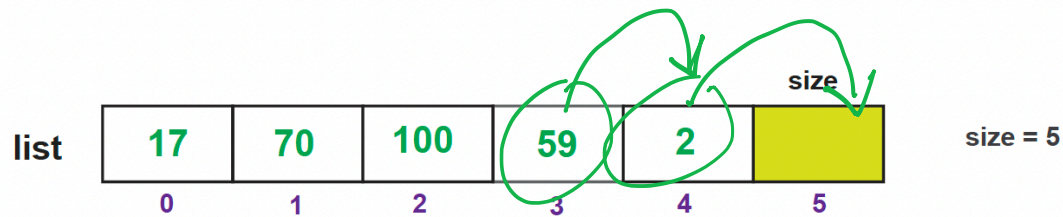


list.add (3, 100) ;

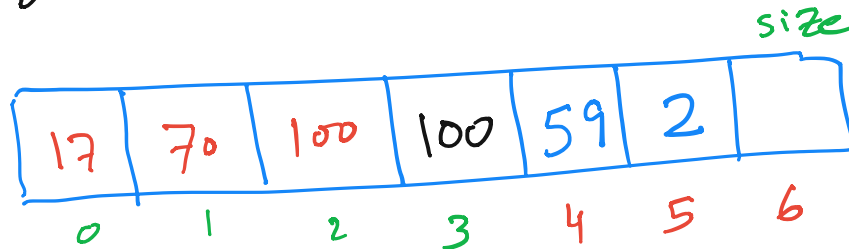

size = 6

5. E set (int index, E item)

Replace the element at position `index` with `item` and return the old value.

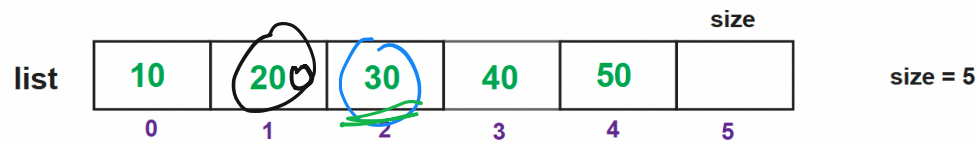

`int oldItem = list.set(2, 100);`


30

`list.set(1, 200);`

index

item

20

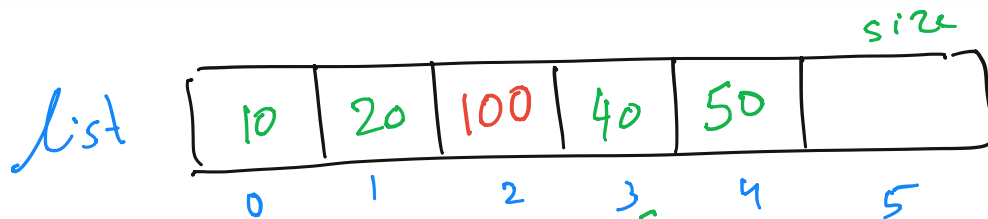


`for (int i = 0; i < list.size; i++)`
`System.out.println(list.get(i));`

`get(0) → 10`
`get(1) → 20`

6. E get (int index)

Returns the element at the position index.

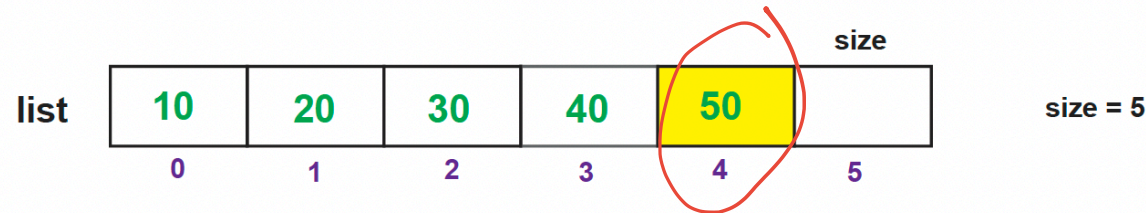

`int item = list.get(4);`

50

`list.get(4);`

50

item
50

`System.out.println(list.get(4));`

7. int indexOf (E item)

Searches for item in the list and returns the position of the first occurrence, or -1 if it is not found in the list.

	size				
list	10	20	30	40	30
	0	1	2	3	4

size = 5

int item1 = list.indexOf(10);

0

list2

5	7	5	10	5	9	5
0	1	2	3	4	5	6


list2.indexOf(5);

-1 list.indexOf(50);

1 list.indexOf(20);


8. E remove (int index)

Removes the element at the given index and return it.

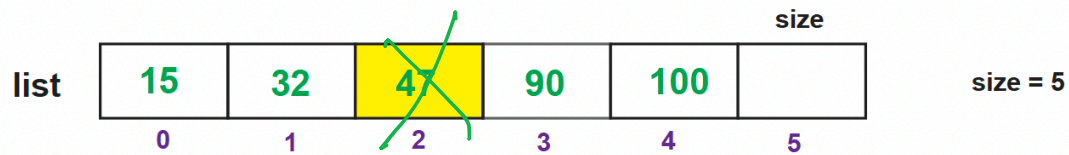

`int item = list.remove(2);`

47


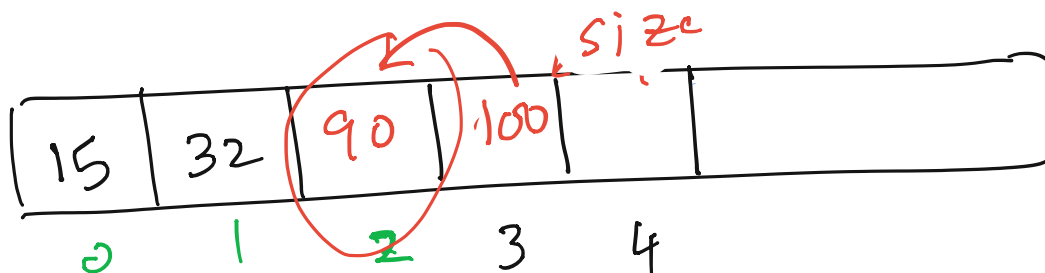


Shift left

size = 4


8. E remove (int index)

Removes the element at the given index and return it.

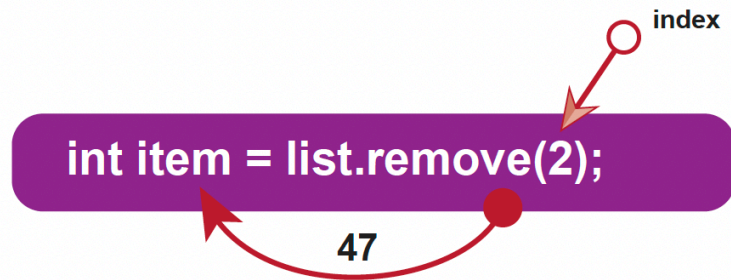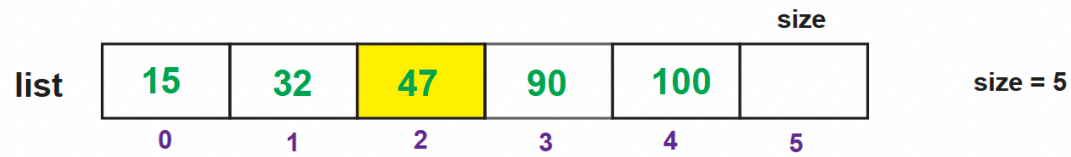

9. boolean remove (E item)

This method remove the first occurrence of the item from the list and return true.

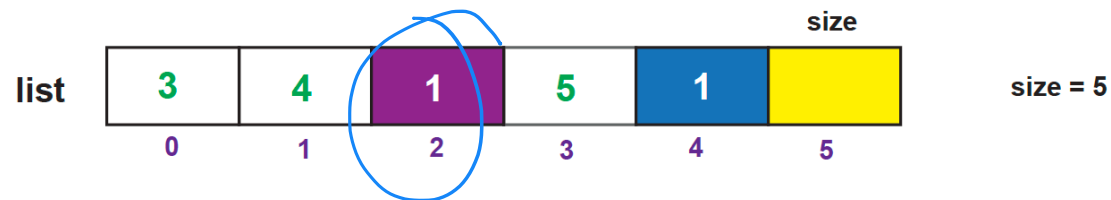


Remove with the argument (Integer), which is Integer object. This is necessary because the remove method takes an object as an argument, not a primitive int.

first occurrence of the item

```
boolean i1 = list.remove((Integer)1);
```

true

list.remove((Integer)1);

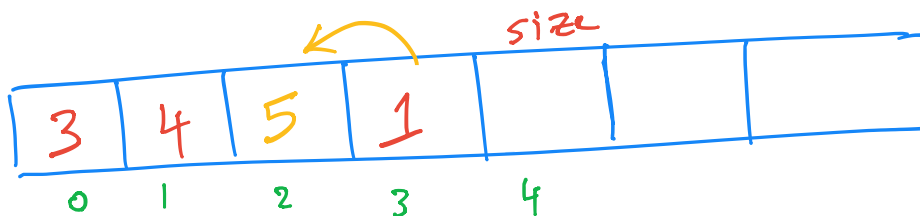

remove number 1


size--;

(1) What is the output of the following code?

```
import java.util.ArrayList;
public class Test {
    public static void main(String[] args) {
        ArrayList<Integer> list = new ArrayList<>();
        System.out.println(list.isEmpty());
        list.add(7);
        list.add(3);
        list.add(4);
        list.add(6);
        list.add(0, 7);
        list.set(2, list.indexOf(7));
        list.remove(1);
        for (int i=0; i<list.size(); i++)
            System.out.println(list.get(i));
    }
}
```

list.isEmpty() → true
list.indexOf(7)
list.set(index, item) → list.set(2, 0)
get(3)

7 ✓
0 ✓
4 ✓
6 ✓

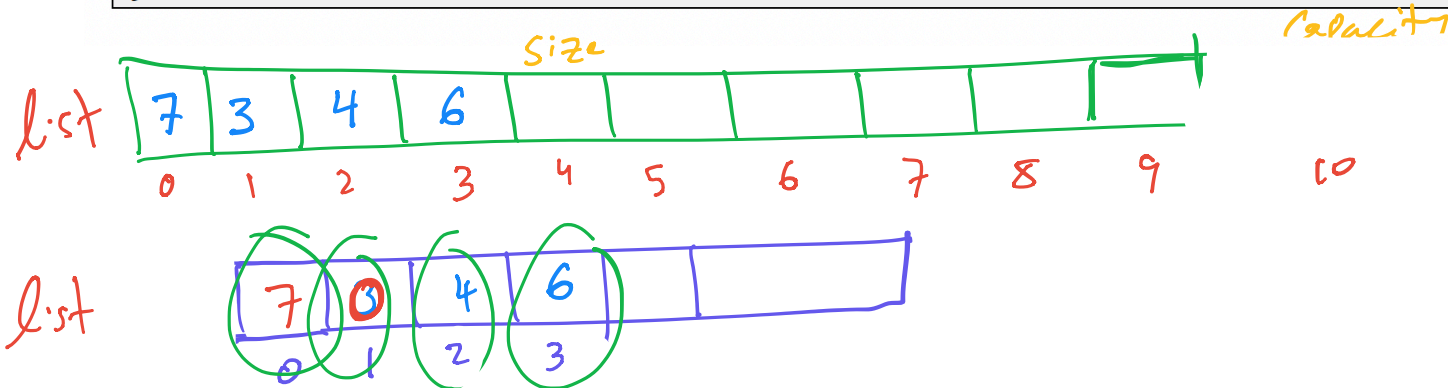


(2) What is the output of the following code?

```
ArrayList<Integer> list = new ArrayList<>();  
for (int i=0; i<4; i++)  
    list.add(i,i+1);  
  
System.out.println(list.get(1));  
System.out.println(list.size());  
list.set(1,100);  
list.add(1,100);  
list.remove((Integer)1);  
for(int i=0; i<list.size(); i++)  
    System.out.print(list.get(i) + "\t");
```


What would be the output of the following code?

```
ArrayList<Integer> list = new ArrayList<Integer>();  
list.add(1);  
list.add(7);  
list.add(22);  
list.add(1,100);  
for (int i=0; i<list.size();i++)  
    System.out.print(list.get(i) + " ");  
list.set(2,50);  
list.remove(1);  
System.out.println();  
for (int i=list.size()-1; i>=0;i--)  
    System.out.print(list.get(i) + " ");
```

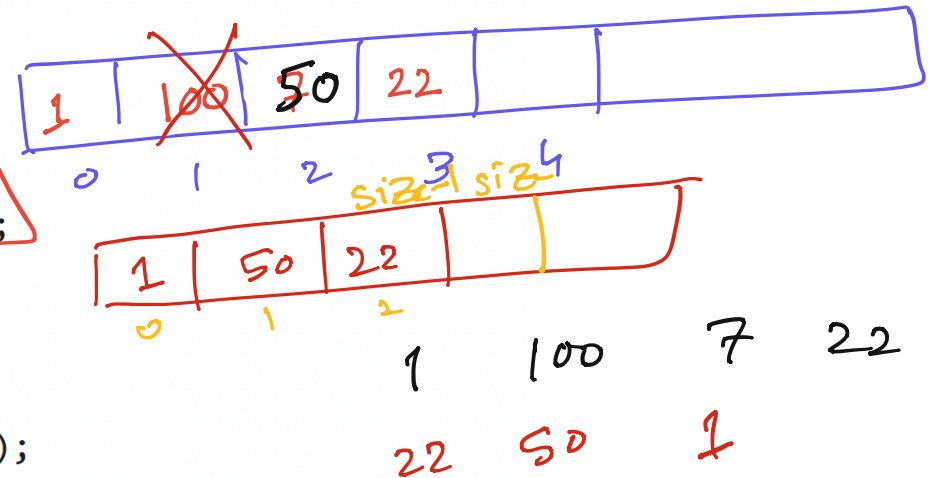

- (a) 22 7 100 1
22 50 1
- (b) 22 50 1
1 100 7 22
- (c) 1 100 7 22
22 50 1
- (d) 1 100 7 22
50 22

Assume that list1 is an object of class type ArrayList<String> of java (similar to KWArrayList class) and it has the following values:

"H" "E" "L" "L" "O"


the instruction:

`list1.set(2, list1.remove(0));`

will change the list to:

- (a) "E" "H" "L" "O"
- (b) "E" "L" "H" "O"
- (c) "H" "E" "L" "O"
- (d) "E" "L" "L" "O"

list1

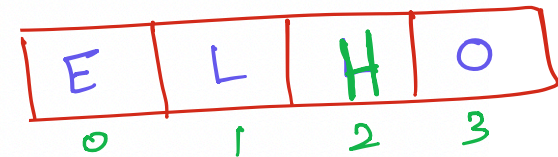

list1.set(2, "H");
index



ITCS214 Students Data Structures

مجتمع واتساب

كل ما تحتاجه للتميز



انضم الآن
لمجتمع المقرر



حاب يوصلك كلشي
يخص المقرر

بدون زحمة القروبات؟